


# ABSR6 BOLLARD

Low Level Products - Architectural Bollard Series

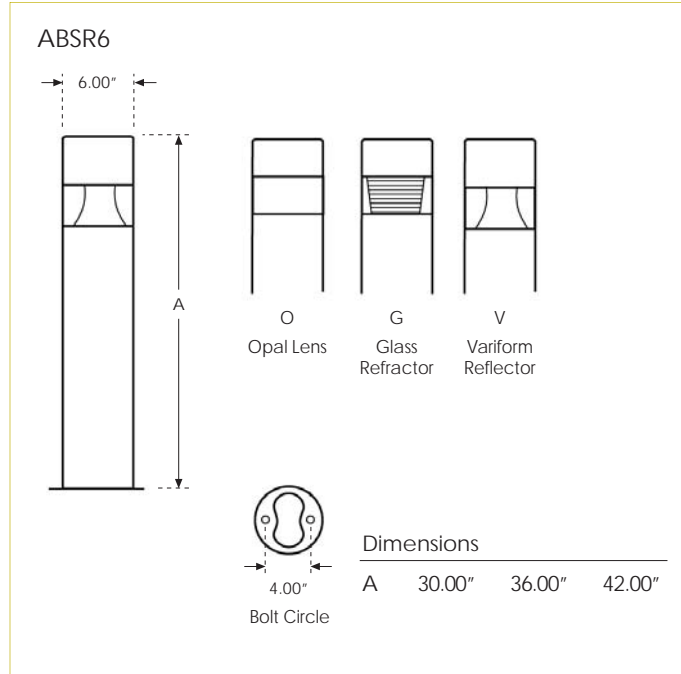

## Design

The ABSR6 is an architectural round bollard designed to compliment traditional architectural with minimalistic styling. Specular optics and various refractor and lens options provide uniform illumination for path of egress.

## Applications

For use with general path and egress, including but not limited to: commercial parking areas, shopping/retail/mall developments, streetscapes, etc.

## Construction

Durable 6" dia. by 0.125" aluminum extruded housing combined with a heavy gauge spun aluminum top cap. Single tool access for ease of maintenance.

## Certification

ETL/cETL listed luminaire, suitable for wet location.

Series	Distribution	Voltage	Height (Inches)	Options*	Finish
Pulse Start MH	O (opal lens)	120	30	F1 (single fuse 120/277)	Smooth Powder
ABSR6P-50	G (glass refractor)	208	36	F2 (dbl fuse 208/240/480)	SA (satin alum.)
ABSR6P-70	V (variform refl)	240	42	HSS (internal house shield)	DB (dark bronze)
		277			BLK (black)
High Pressure Sodium		480			WHT (white)
ABSR6S-35					GR (gray)
ABSR6S-50					Special
ABSR6S-70					RAL(*) (*specify #)

Refer to spec sheet for additional details, available accessories, and specific ordering information. (\*some options may not be available in some configurations)